

Cool Running Sump Pumps



225% more cooling capacity than cast iron!

Features:

- Finned aluminum motor housing for improved cooling
- Powder coated for corrosion resistance
- Permanently lubricated upper and lower bearings
- Vortex-style impeller reduces clogging by foreign material
- Quick-disconnect power cord
- Oil-filled thermally protected motor



Model 237

5.2 amps
1/3 hp



Model 457

7.5 amps
1/2 hp



Liberty Pumps®

libertypumps.com


800.543.2550

230-Series & 450-Series


Features

- Lightweight, high performance submersible pump
- Anti-airlock hole allows trapped air to escape and the pump to prime and start pumping
- Removable base allows suction down to 1/8"
- Deep finned powder coated aluminum motor housing provides 225% more cooling capacity than cast iron housings

230-Series Performance Curve

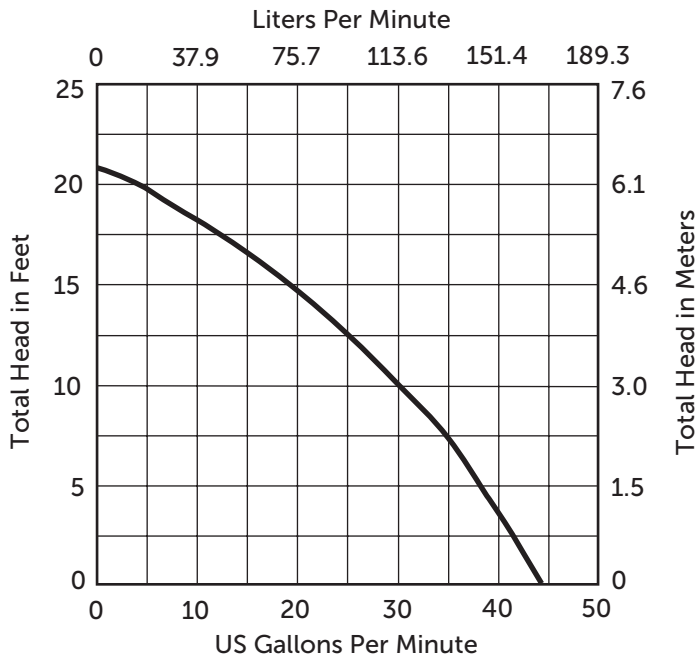

450-Series Performance Curve

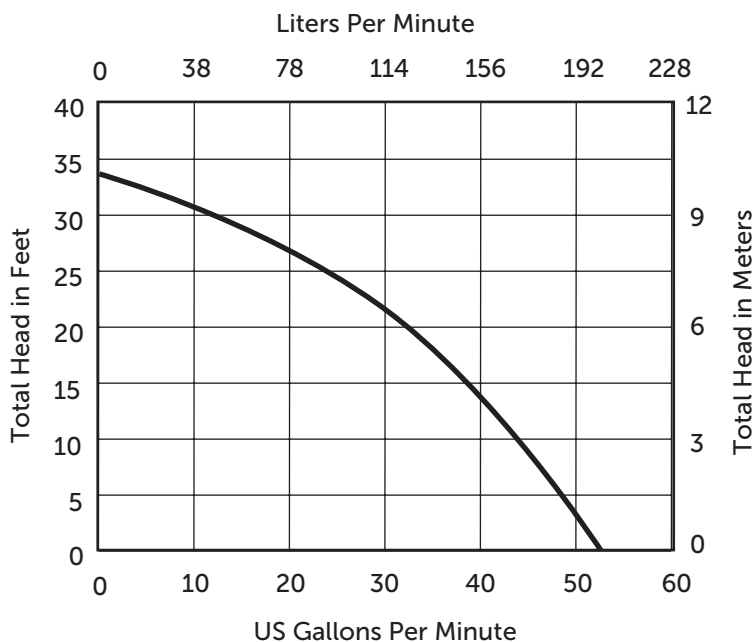

Motor Specifications

230-Series

1/3 hp 115V 5.2A

Thermally Protected & Permanently Lubricated
Permanent Split Capacitor (PSC)

450-Series

1/2hp 115V 7.5A

Oil-filled

Thermally protected

Permanent Split Capacitor (PSC)

Dimensional Data

230-Series

Height: 10-1/2"

Width: 9-3/5"

Minimum Sump Diameter: 14" (10" on Model 237)

Weight: 11 lbs

450-Series

Height: 12.5"

Width: 9.6"

Minimum Sump Diameter: 14" (10" on Model 457)

Weight: 12.5 lbs