
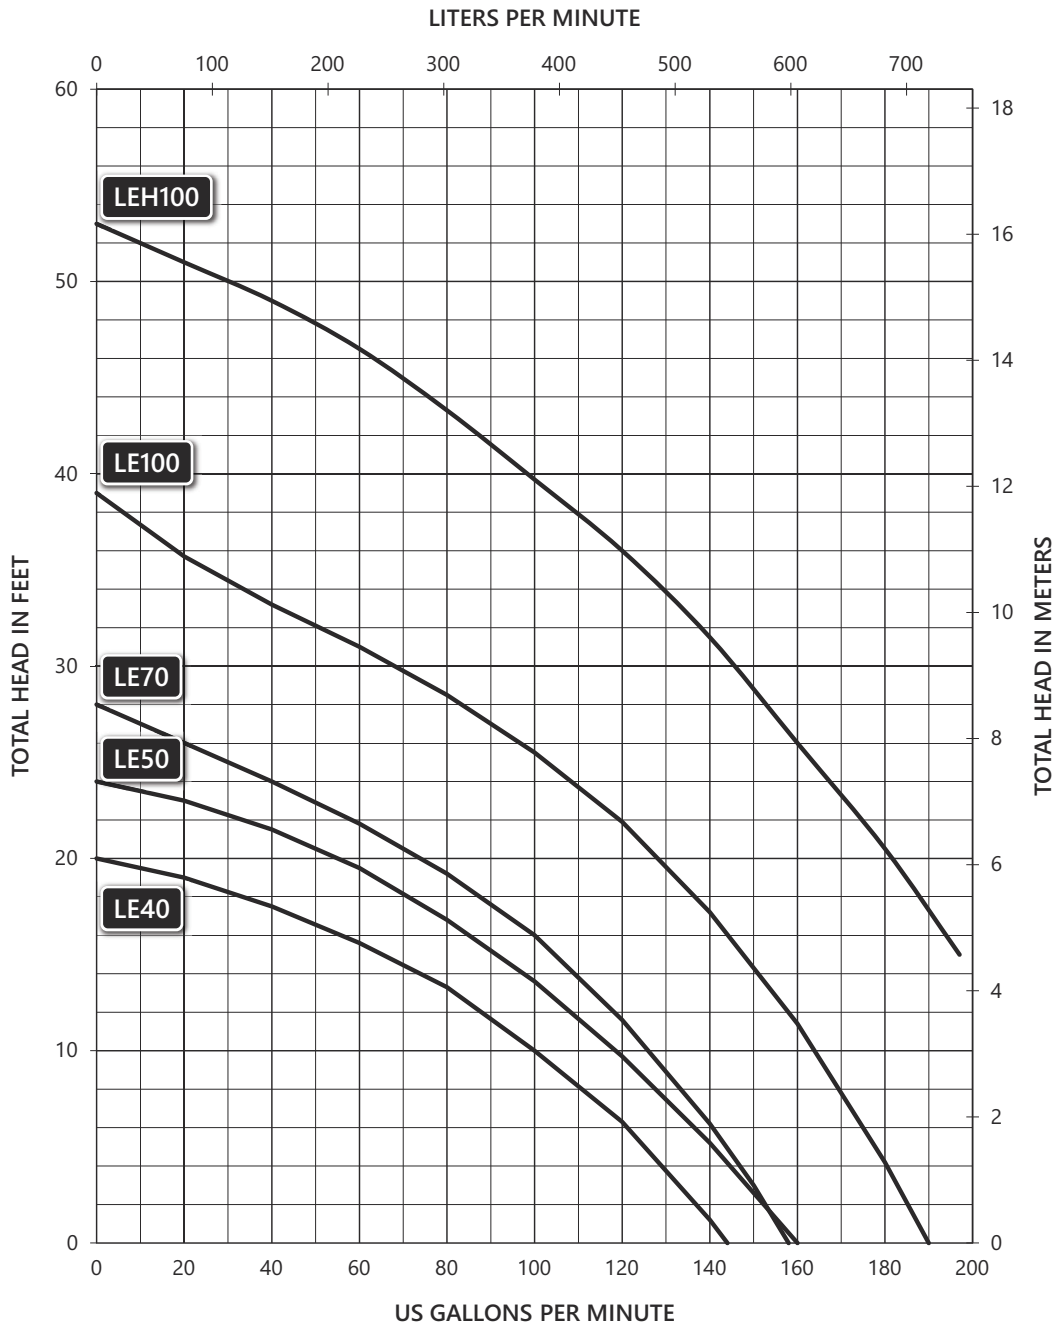




System Specifications

Pro370-Series


Submersible Simplex Sewage System

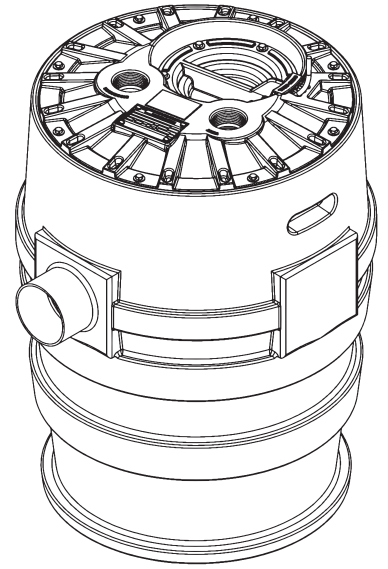


Pro370-Series Dimensional Data

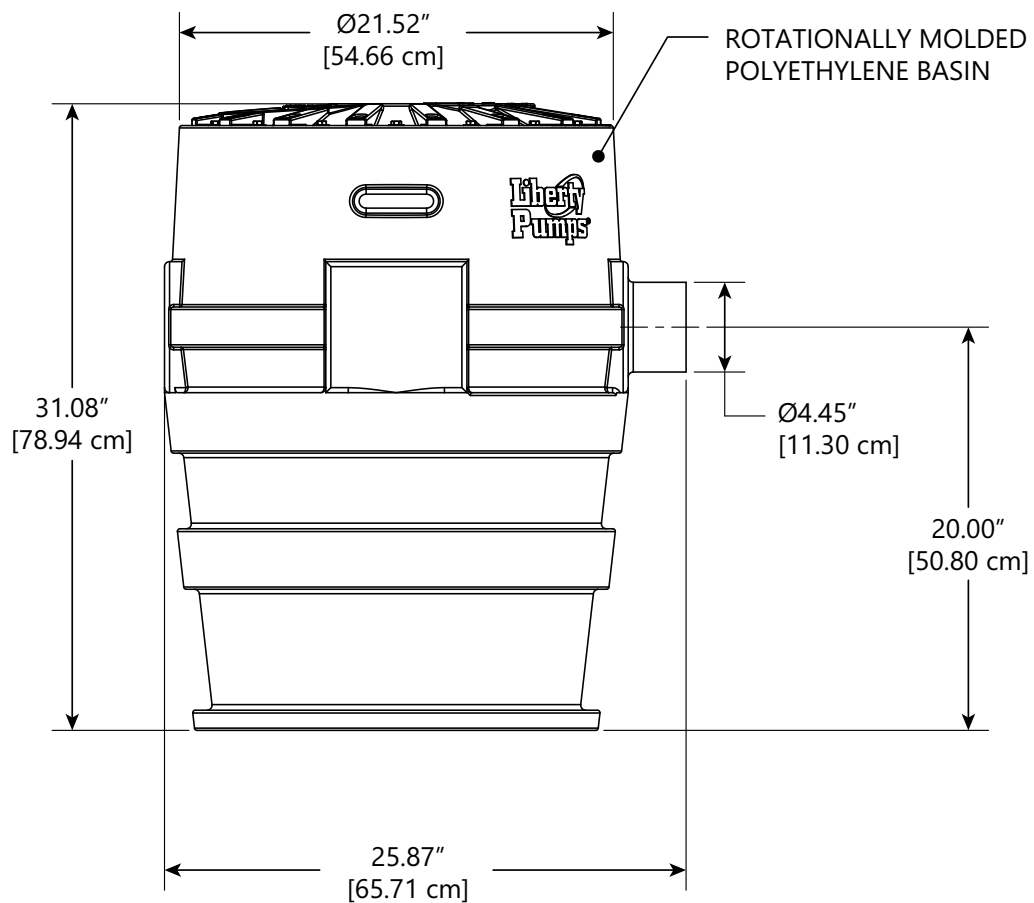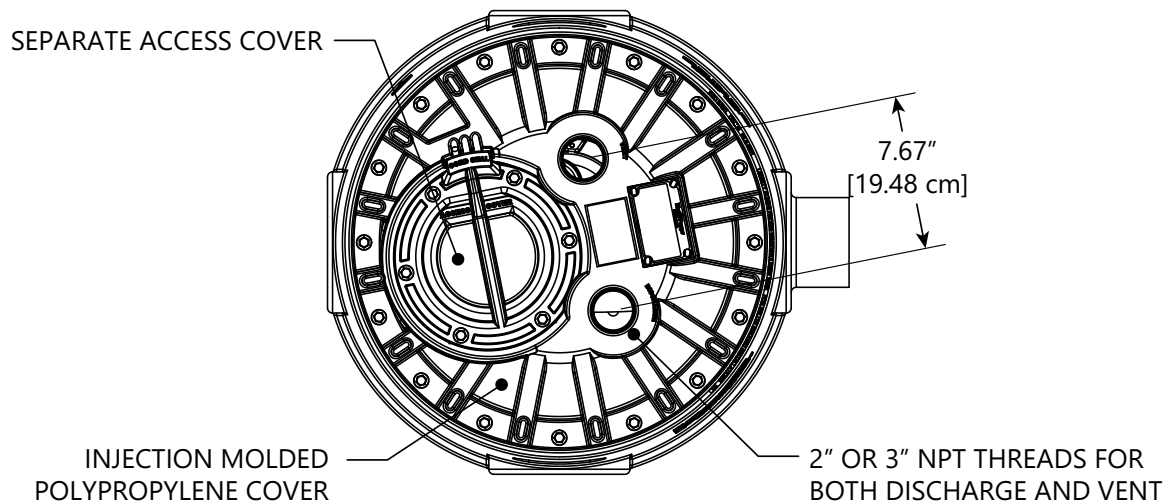


Pro370-Series Dimensional Data

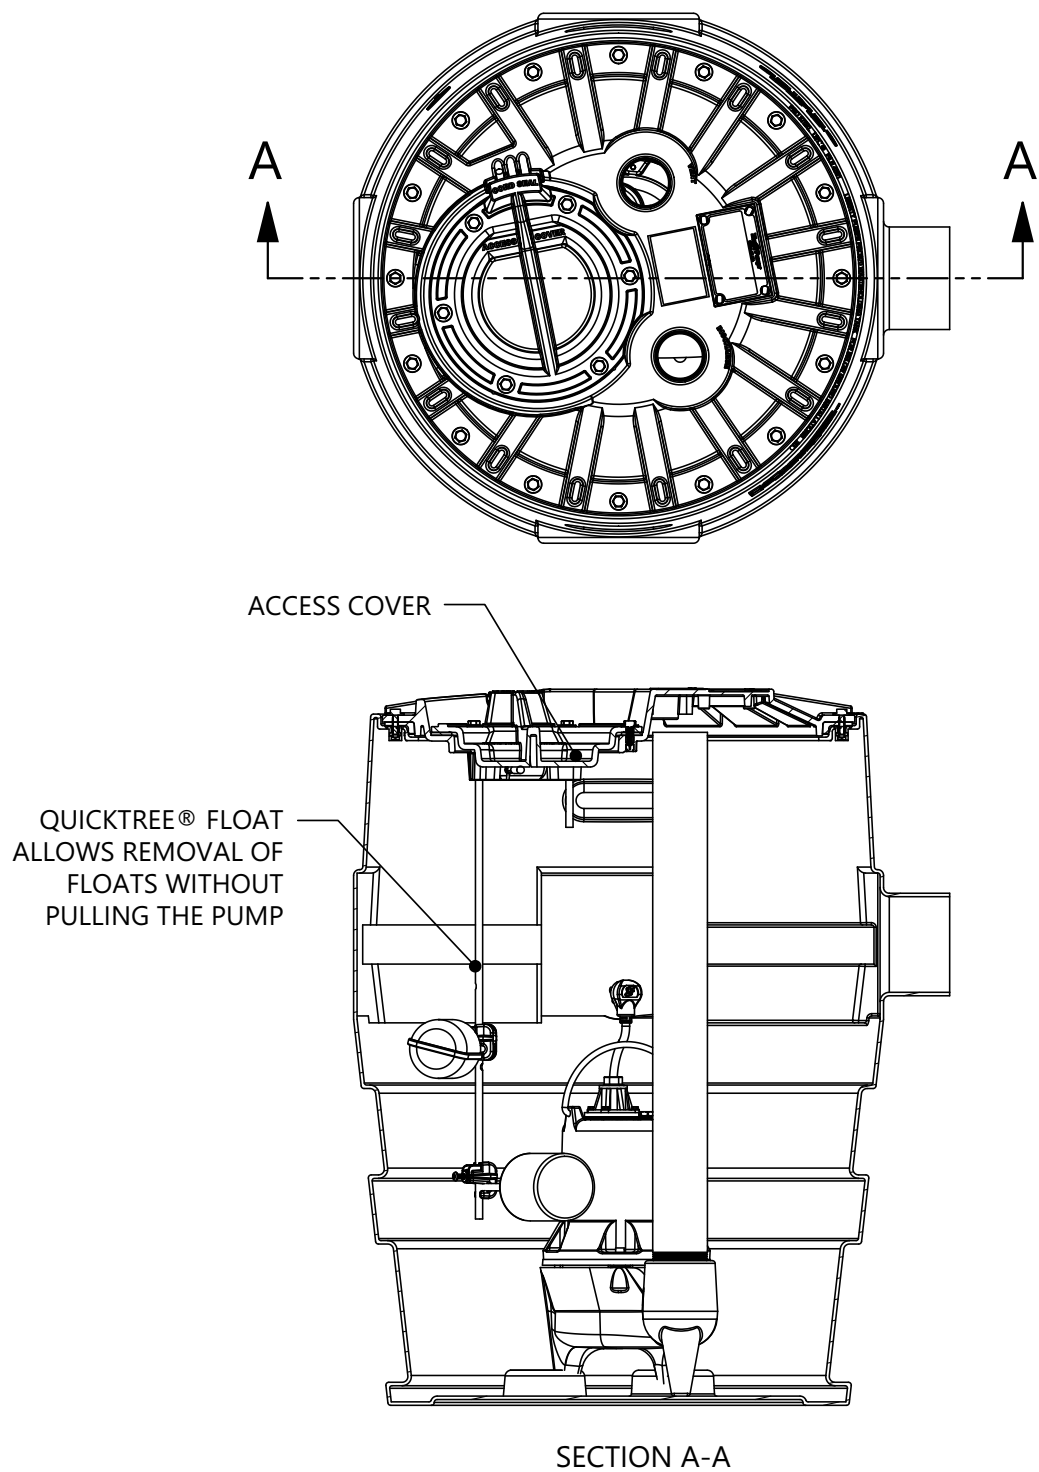

Pro370-Series Dimensional Data

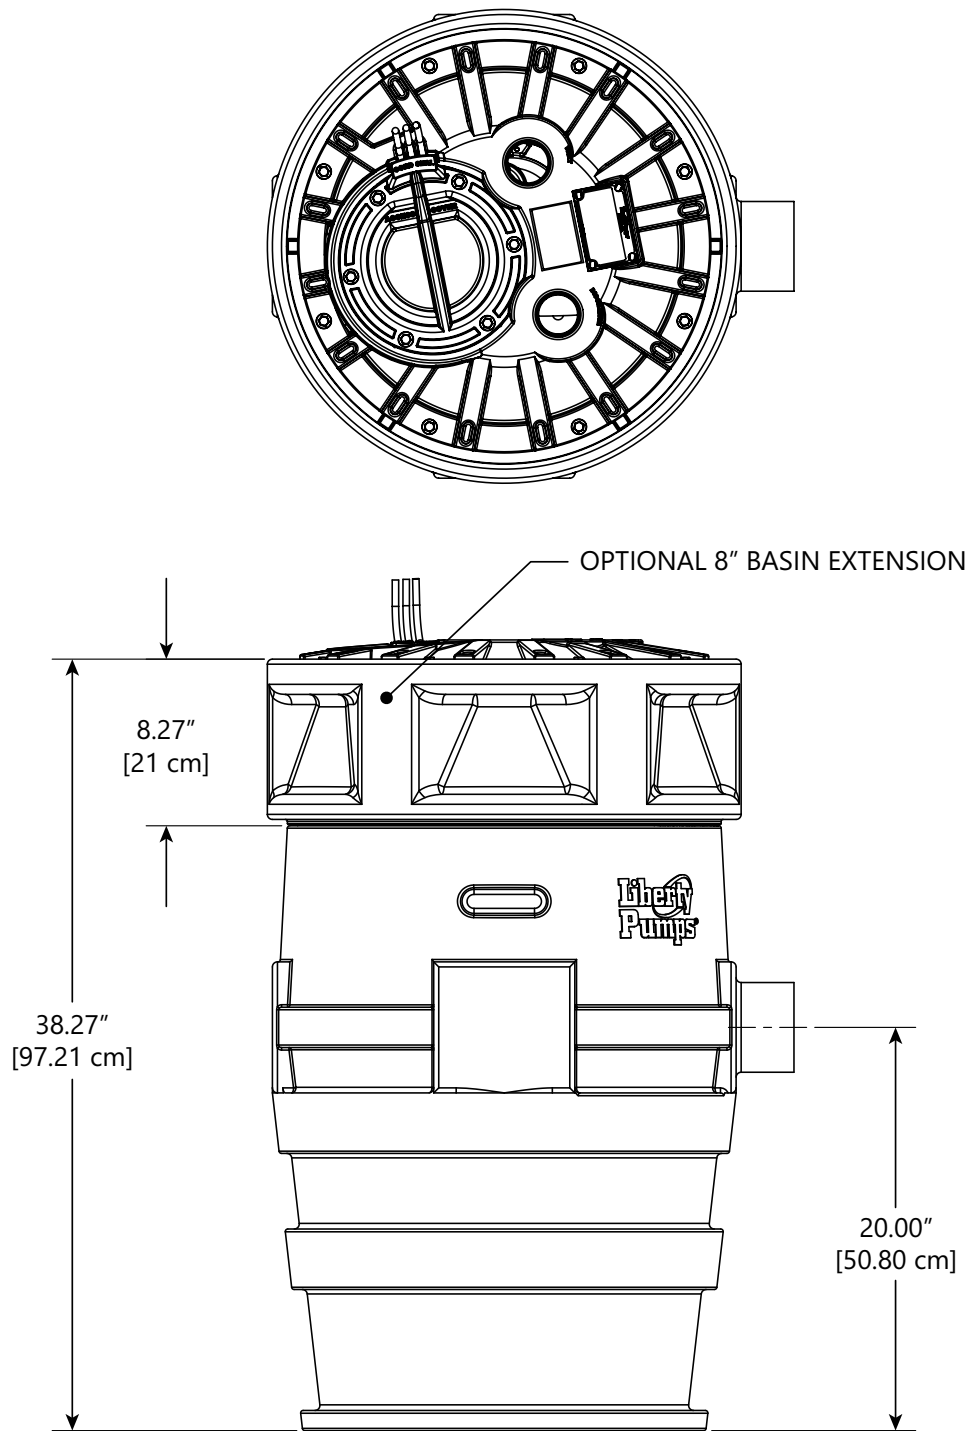

Pro370-Series Dimensional Data

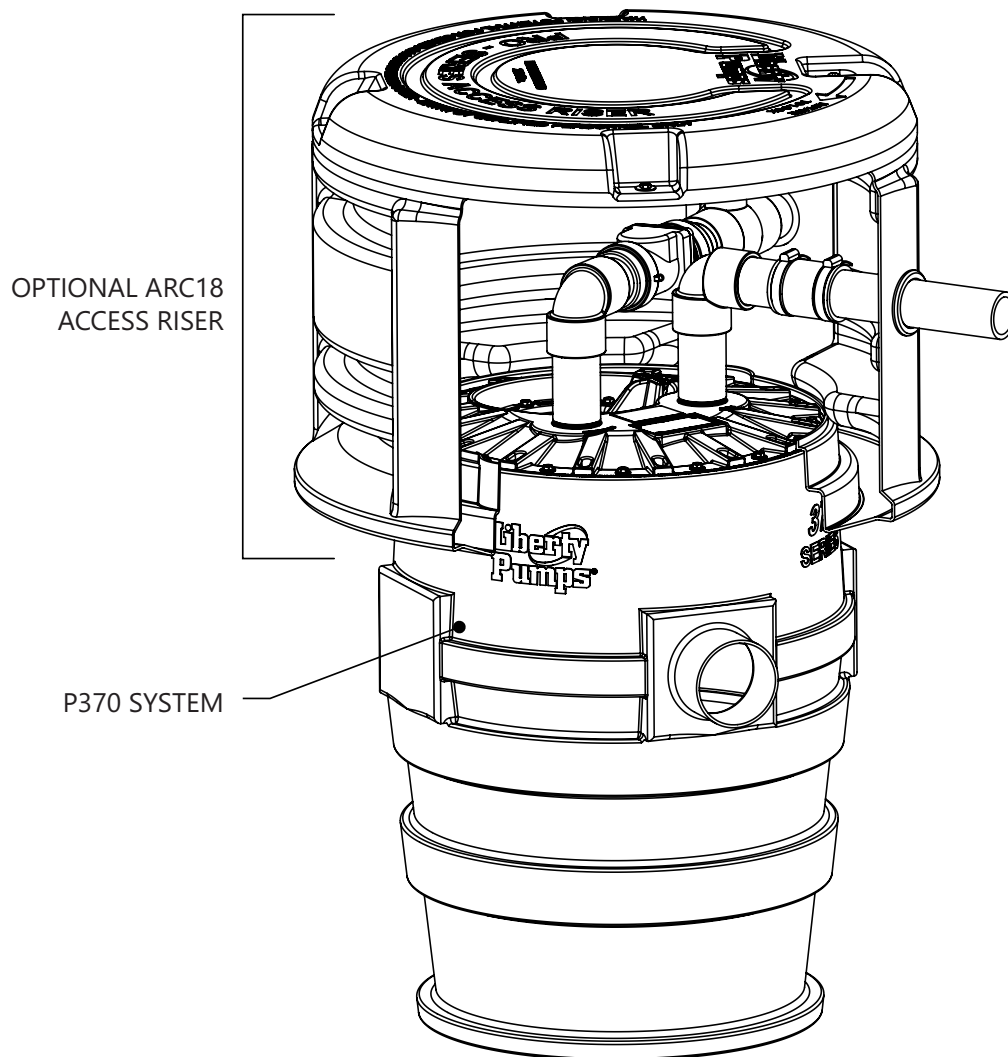

Pro370-Series Electrical Data

MODEL	HP	VOLTAGE	PHASE	SF	FULL LOAD AMPS	LOCKED ROTOR AMPS	THERMAL OVERLOAD TEMP	STATOR WINDING CLASS	DISCHARGE	CORD LENGTH	AUTOMATIC
P372LE41	4/10	115	1	1.00	12	22.5	105°C / 221°F	B	2"	10'	YES
P372LE41-2	4/10	115	1	1.00	12	22.5	105°C / 221°F	B	2"	25'	YES
P372LE51	1/2	115	1	1.00	12	22.5	105°C / 221°F	B	2"	10'	YES
P372LE51-2	1/2	115	1	1.00	12	22.5	105°C / 221°F	B	2"	25'	YES
P372LE52	1/2	208-230	1	1.00	6.8	12	105°C / 221°F	B	2"	10'	YES
P372LE52-2	1/2	208-230	1	1.00	6.8	12	105°C / 221°F	B	2"	25'	YES
P372LE71	3/4	115	1	1.00	12	28	105°C / 221°F	B	2"	10'	YES
P372LE71-2	3/4	115	1	1.00	12	28	105°C / 221°F	B	2"	25'	YES
P372LE72	3/4	208-230	1	1.00	6	13	105°C / 221°F	B	2"	10'	YES
P372LE72-2	3/4	208-230	1	1.00	6	13	105°C / 221°F	B	2"	25'	YES
P372LE102	1	208-230	1	1.00	8	21	105°C / 221°F	B	2"	10'	YES
P372LE102-2	1	208-230	1	1.00	8	21	105°C / 221°F	B	2"	25'	YES
P372LEH102	1	230	1	1.00	12	28.6	120°C / 248°F	B	2"	10'	YES
P372LEH102-2	1	230	1	1.00	12	28.6	120°C / 248°F	B	2"	25'	YES
P373LE41	4/10	115	1	1.00	12	22.5	105°C / 221°F	B	3"	10'	YES
P373LE41-2	4/10	115	1	1.00	12	22.5	105°C / 221°F	B	3"	25'	YES
P373LE51	1/2	115	1	1.00	12	22.5	105°C / 221°F	B	3"	10'	YES
P373LE51-2	1/2	115	1	1.00	12	22.5	105°C / 221°F	B	3"	25'	YES
P373LE52	1/2	208-230	1	1.00	6.8	12	105°C / 221°F	B	3"	10'	YES
P373LE52-2	1/2	208-230	1	1.00	6.8	12	105°C / 221°F	B	3"	25'	YES
P373LE71	3/4	115	1	1.00	12	28	105°C / 221°F	B	3"	10'	YES
P373LE71-2	3/4	115	1	1.00	12	28	105°C / 221°F	B	3"	25'	YES
P373LE72	3/4	208-230	1	1.00	6	13	105°C / 221°F	B	3"	10'	YES
P373LE72-2	3/4	208-230	1	1.00	6	13	105°C / 221°F	B	3"	25'	YES
P373LE102	1	208-230	1	1.00	8	21	105°C / 221°F	B	3"	10'	YES
P373LE102-2	1	208-230	1	1.00	8	21	105°C / 221°F	B	3"	25'	YES
P373LEH102	1	230	1	1.00	12	28.6	120°C / 248°F	B	3"	10'	YES
P373LEH102-2	1	230	1	1.00	12	28.6	120°C / 248°F	B	3"	25'	YES

Pro370-Series Technical Data

SYSTEM	TANK	POLYETHYLENE (XL MODELS UTILIZE A UPC LISTED POLYETHYLENE BASIN THAT MEETS IAPMO PS52 10' STACK TEST)
	COVER	POLYPROPYLENE
	INLET HUB	INCORPORATED INTO TANK
	DISCHARGE PIPING	SCHEDULE 80 PVC
	CONTROLS	PIGGYBACK FLOAT
PUMP	IMPELLER	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	SOLIDS HANDLING SIZE	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	PAINT	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	MAX LIQUID TEMP	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	MAX STATOR TEMP	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	THERMAL OVERLOAD	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	POWER CORD TYPE	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	MOTOR HOUSING	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	VOLUTE	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	SHAFT	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	HARDWARE	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	O-RINGS	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	MECHANICAL SEAL	SEE INDIVIDUAL PUMP MODELS SPEC SHEET
	MIN BEARING LIFE	SEE INDIVIDUAL PUMP MODELS SPEC SHEET

Pro370-Series Specifications

See individual pump specification for more pump details.

1.01 WARRANTY

Standard limited warranty shall be 3 years.