

LSG500-SERIES

Sewage Grinder Pump

Liberty Pumps®

A Family and Employee Owned Company

commercial**series**

5 hp

**2", 2-1/2" & 3" ANSI® Horizontal
Discharge with 2" NPT**

**2"/3" NPT Vertical Discharge
Models Available**

Features

- Cast iron construction with durable powder coat finish
- Stainless steel hardware
- Buna-N O-ring seals
- Quick-connect cords in 35' & 50' lengths
- Patented V-Slice® Cutter Technology
- Dual seal with seal leak detection
- MidTherm™ Cooling provides more efficient motor cooling

NEW!

Combo Volute

One pump, multiple discharge options



Horizontal discharge models feature ANSI® 150# 2"-3" and a 2" NPT



Vertical discharge models feature a 2" threaded elbow with a 3" threaded flange



Patent: See
LibertyPumps.com/patents

***Proudly made in the USA
with US & global components***

innovate. evolve.

LSG500-Series

Impeller

Balanced stainless steel

Finish

Powder coat

Max Fluid Temperature

104°F (40°C) Continuous duty

Motor

Oil-filled, Class F insulation,
Inverter duty rated

Power Cord Type

1-phase is Type W; 3-phase is SOOW
Quick-connect 35' or 50' length options

Motor Housing

Class 30 cast iron

Volute

Class 30 cast iron

Shaft

Stainless steel

Mechanical Shaft Seals

Dual seal arrangement

- Lower (primary) silicon carbide/
silicon carbide
- Upper (secondary) carbon/ceramic

Bearings


- Upper bearings single row deep groove
- Lower bearings double row angular contact

Warranty

18 Months from the date of installation or
24 months from the date of manufacture
*See Liberty Pumps Limited Warranty - Wholesale
Commercial Series*

Performance Curve



60 Hz, 3450 RPM

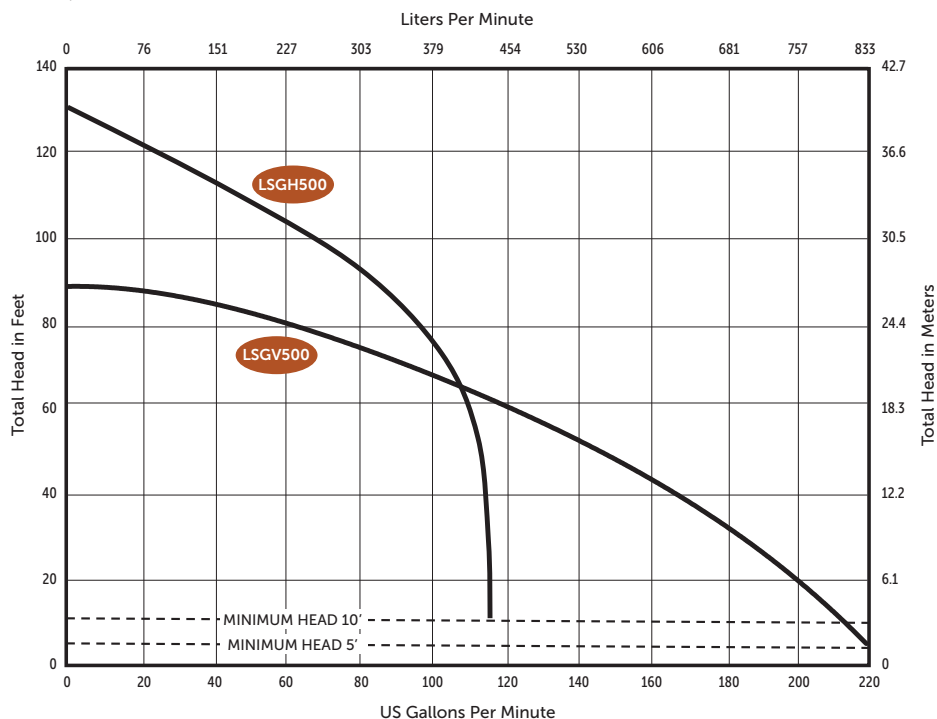


Patented V-Slice® Cutter Technology




Dimensional Data - ANSI® Horizontal Discharge

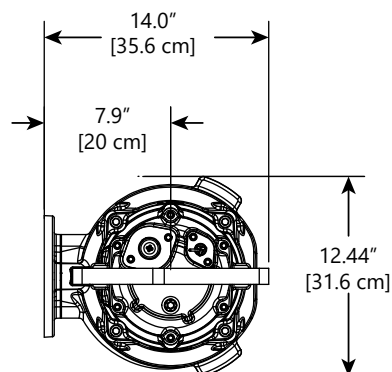

**Optional 4" ANSI®
Discharge Kit K002016
[sold separately]**

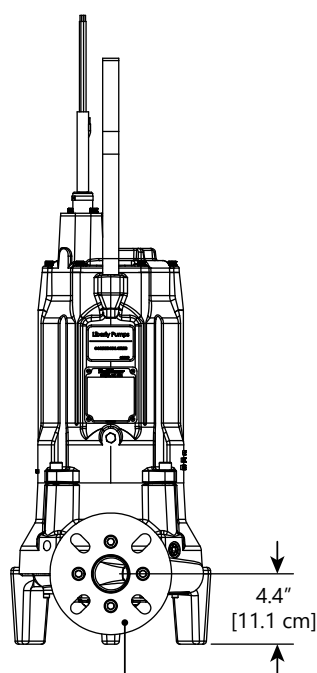

2", 2.5" & 3" 150# ANSI
(DIN 50-PN10, DIN 65-PN10, AND DIN 80-PN6)
WITH 2" NPT

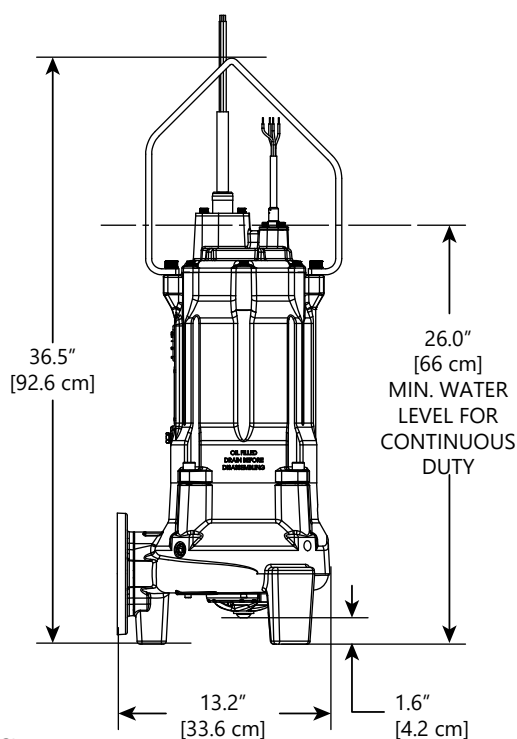

Models - ANSI® Horizontal Discharge




MODEL	HP	VOLTS	PHASE	AMPS	CORD LENGTH	DISCHARGE	WEIGHT in LBS
LSGV502M-3	5	230	1	26	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGV503M-3	5	200/230*	3	17.5/16.5	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGV504M-3	5	460	3	8	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGV505M-3	5	575	3	6.2	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGH502M-3	5	230	1	30	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGH503M-3	5	200/230*	3	20/18.2	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGH504M-3	5	460	3	9	35'	2", 2.5" & 3" ANSI Horizontal	270
LSGH505M-3	5	575	3	6	35'	2", 2.5" & 3" ANSI Horizontal	270

For 50' cord option, add "-5" suffix to model number. Example: LSGV502M-5

*System voltages: 208 and 240 volts with utilization voltages: 200 and 230 volts

LSG500-Series

Dimensional Data - Vertical Discharge

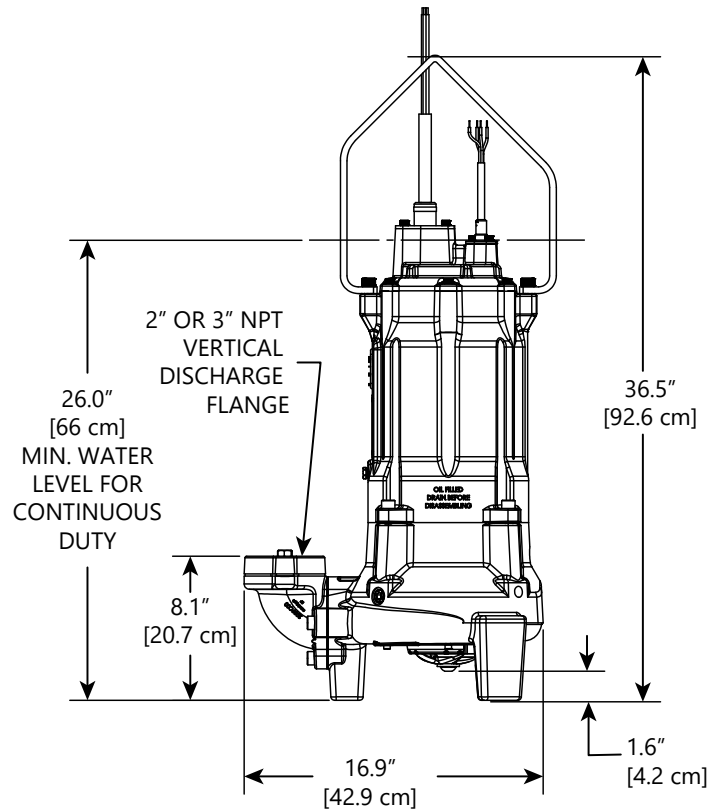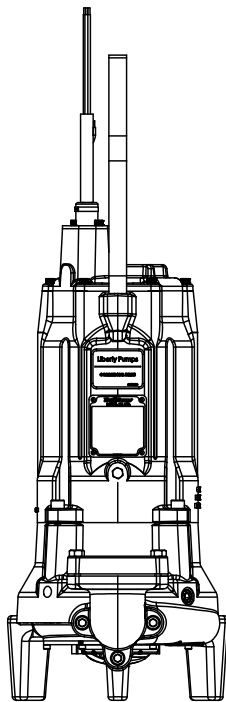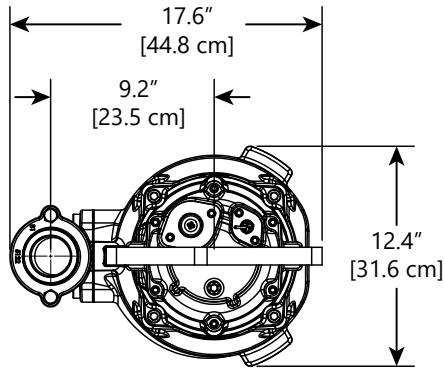

Models - Vertical Discharge

MODEL	HP	VOLTS	PHASE	AMPS	CORD LENGTH	DISCHARGE	WEIGHT in LBS
LSGV502MV-3	5	230	1	26	35'	2" & 3" NPT Vertical	270
LSGV503MV-3	5	200/230*	3	17.5/16.5	35'	2" & 3" NPT Vertical	270
LSGV504MV-3	5	460	3	8	35'	2" & 3" NPT Vertical	270
LSGV505MV-3	5	575	3	6.2	35'	2" & 3" NPT Vertical	270
LSGH502MV-3	5	230	1	30	35'	2" & 3" NPT Vertical	270
LSGH503MV-3	5	200/230*	3	20/18.2	35'	2" & 3" NPT Vertical	270
LSGH504MV-3	5	460	3	9	35'	2" & 3" NPT Vertical	270
LSGH505MV-3	5	575	3	6	35'	2" & 3" NPT Vertical	270

For 50' cord option, add "-5" suffix to model number. Example: LSGV502MV-5
 *System voltages: 208 and 240 volts with utilization voltages: 200 and 230 volts

Specifications subject to change without notice.

Copyright © Liberty Pumps, Inc. 2025 All rights reserved. LLIT006856-R02/25

Liberty Pumps - 7000 Apple Tree Avenue - Bergen, New York 14416
 Phone 800-543-2550 - Fax 585-494-1839 - LibertyPumps.com