

PRO680-SERIES

Duplex Pump System

Liberty Pumps®

A Family and Employee Owned Company

2" Discharge

Compact duplex system - designed for residential and light commercial sewage applications.

Perfect for basement bathroom additions and remodeling projects.

Available in 115V or 230V.

Fully assembled from factory.

Features

- Robust system features a compact heavy-duty polyethylene basin and cover
- Solids handling and ProVore® grinder models available
- 46 Gallon capacity
- System can be installed above or below floor level
- Two pumps provide uninterrupted service
- Easy access cover with QuickTree® technology – allows for quick float switch removal and servicing
- Heavy-duty integrated rubber gaskets on covers
- Secure 16-bolt cover standard on all models
- Passes 10' stack test



Indoor Model Shown

Includes duplex pump controller and alarm. Plug-in ready cords for quick, easy installation on indoor model. (Indoor and outdoor models available.)

Pro680

QuickTree® Technology




innovate. evolve.

Pro680-Series

Features


- QuickTree® technology allows easy access and removal of float switches without disturbing pump or plumbing
- Integrated rubber seals permanently attached to cover
- Unique cord seal technology integrated into the inspection cover
- Shallow basin design (24") for easier installation in difficult soil/bedrock locations
- Large 46 gallon capacity for longer pump cycles
- Integrally-molded torque stops secure the pump in its proper position
- Integrally-molded anti-flotation collar
- Durable polyethylene construction
- Completely assembled

Dimensional Data

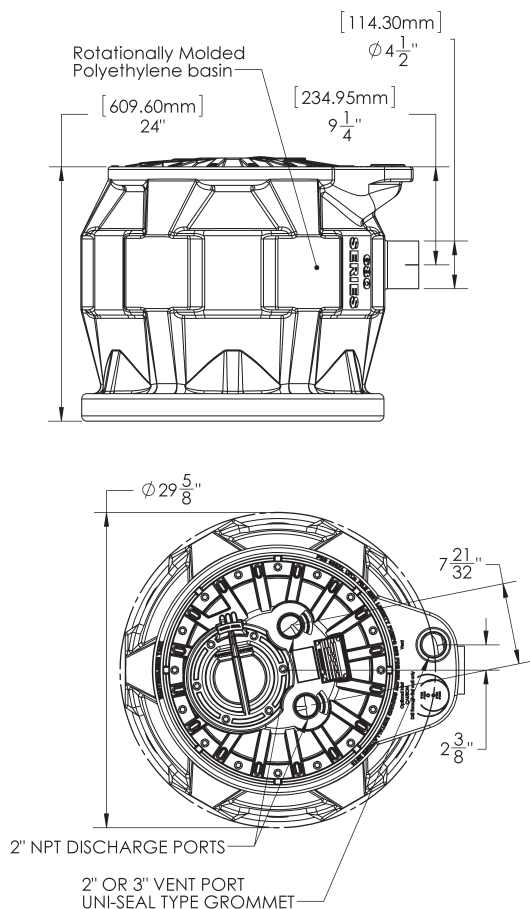


QuickTree® Technology

Integral Rubber Seals

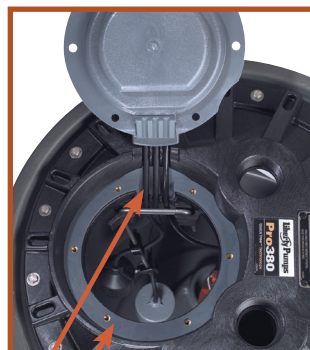


Unique integrated cord seal technology and permanent rubber cover gaskets.

Float switches are easy-to-service with QuickTree® Technology

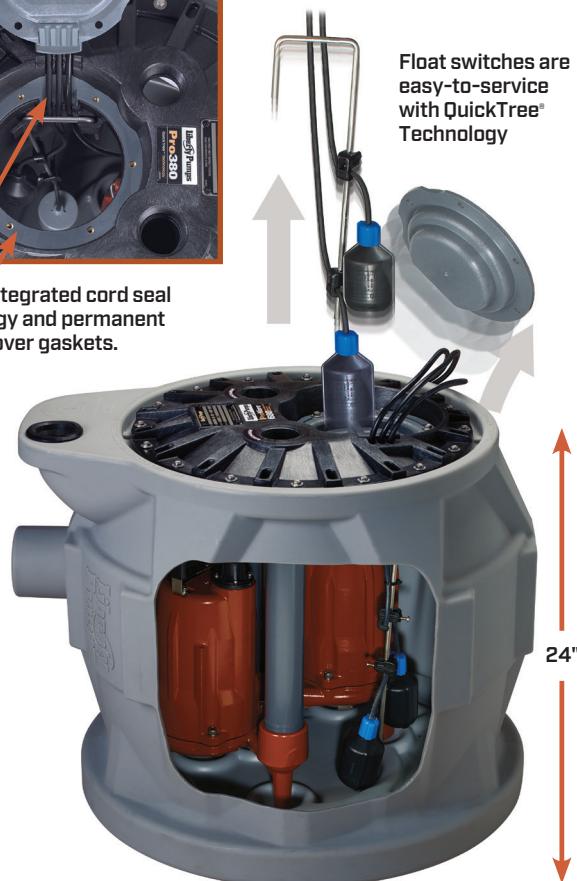


Patent: See LibertyPumps.com/en-us/patents

Performance Curve

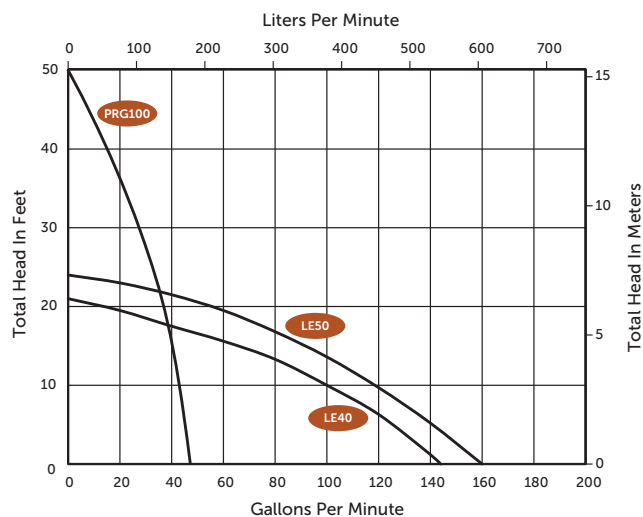

Pro680-Series

Compact Duplex System

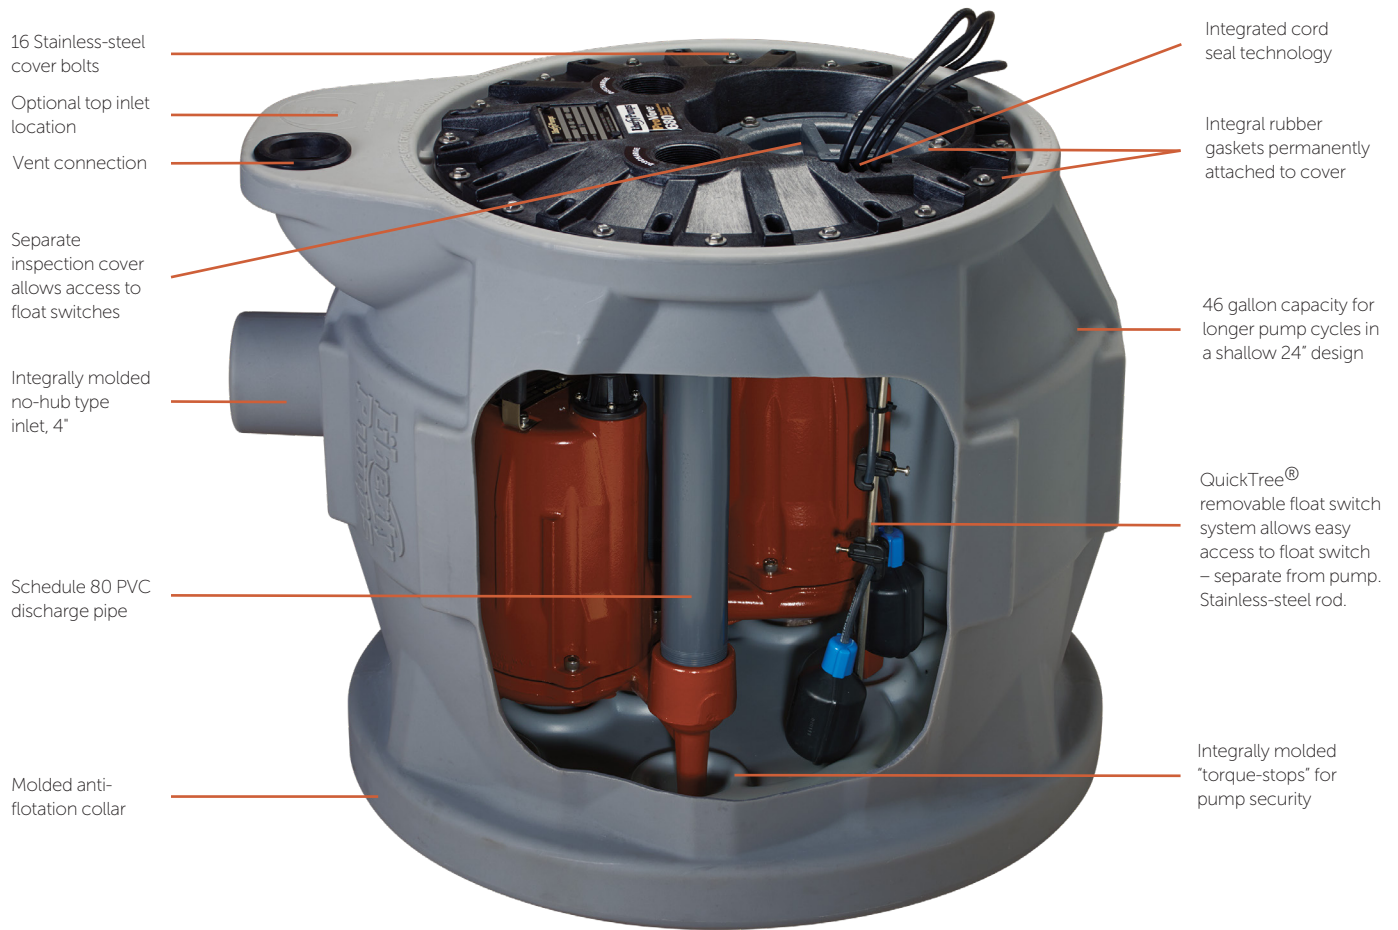

Patent: See
LibertyPumps.com/en-us/patents



IAPMO Listed Basin

The Pro680XL basin is specifically designed to pass a 10' stack test and is IAPMO listed.

Models

MODEL	HP	VOLTS	PHASE	AMPS	DISCHARGE	CORD LENGTH	CONTROLLER	WEIGHT IN LBS
ProVore® Grinder Models								
P682XPRG101	1	115	1	12	2"	10'	Indoor	151
P682XPRG101W	1	115	1	12	2"	10'	Outdoor	152
P682XPRG102	1	230	1	6	2"	10'	Indoor	151
P682XPRG102W	1	230	1	6	2"	10'	Outdoor	152
LE-Series Solids Handling Models								
P682XLE41	4/10	115	1	12	2"	10'	Indoor	132
P682XLE41W	4/10	115	1	12	2"	10'	Outdoor	132
P682XLE51	1/2	115	1	12	2"	10'	Indoor	136
P682XLE51W	1/2	115	1	12	2"	10'	Outdoor	135
P682XLE52	1/2	230	1	6	2"	10'	Indoor	135
P682XLE52W	1/2	230	1	6	2"	10'	Outdoor	136

See PRG-Series or LE40/LE50-Series literature for complete pump performance and specifications data. For 25' pump and float switch cords, add "-2" suffix to model number.
 Example: P682XPRG101-2

Optional Basin Extension

X8-D

8" Basin Extension


Sealed basin extension increases Pro-Series height by 8", allowing longer pitched pipe runs to the inlet connection.

Model X8-D extension includes gasket, stainless-steel bolts, longer QuickTree® for float switch mounting and discharge pipe extension.

To order an X8-D extension factory assembled to any ProVore®-Series system, add "X8D" to model number

Examples: P682X8DXPRG101

For outdoor installations, ARC18 Access Riser must be installed in conjunction with the X8-D Extension. See Pro-Series Accessories for information on ARC18 Riser.

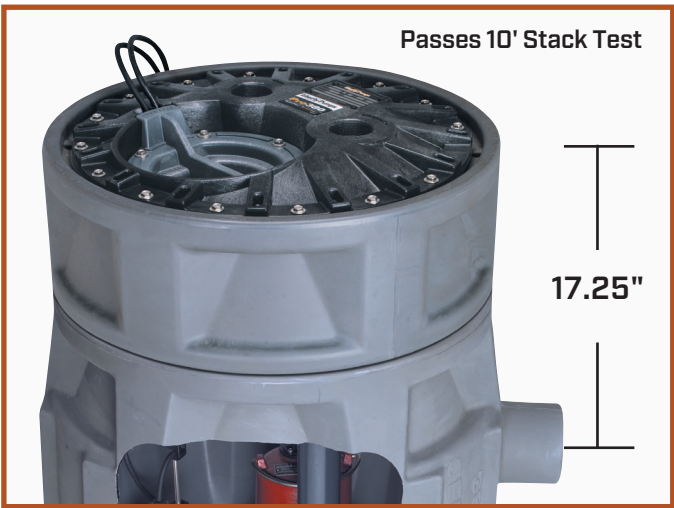

PDC Duplex Control



Indoor model shown

- Automatically alternates pump operation – equalizing wear and extending pump life
- Plug-in ready wiring for easy and quick installation (indoor model only)
- QuickTree® mounted float switches with Quick-connect at box (indoor model only)
- Green power indicator
- Green pump run indicators
- Audible and visual alarm
- 9-Volt back-up for alarm
- Receptacles are angled to accept standard or right-angled plugs
- Programmed automatic 6 hour run limiter protects against run-dry pump conditions
- NEMA 1 indoor or NEMA 4X outdoor options available

Voltage: 115V or 230V depending on system ordered (60 Hz)

MODEL	VOLTS	PHASE	HZ	CORD LENGTH	INDOOR/OUTDOOR	SYSTEM
PDC-115	115	1	60	10'	Indoor	P682XPRG101
PDCW-115	115	1	60	10'	Outdoor	P682XPRG101W
PDC-230	230	1	60	10'	Indoor	P682XPRG102
PDCW-230	230	1	60	10'	Outdoor	P682XPRG102W

Pro680 duplex systems are shipped complete with the PDC control unit. Float switches are pre-set at proper levels in the system. See PDC literature sheet for complete control specifications. For 25' float cord, add "-2" suffix to model number. Example: PDC-115-2