





A Family and Employee Owned Company


Product Specifications

Pro680-Series


Duplex Sewage Packages with LE40/LE50-Series Pumps

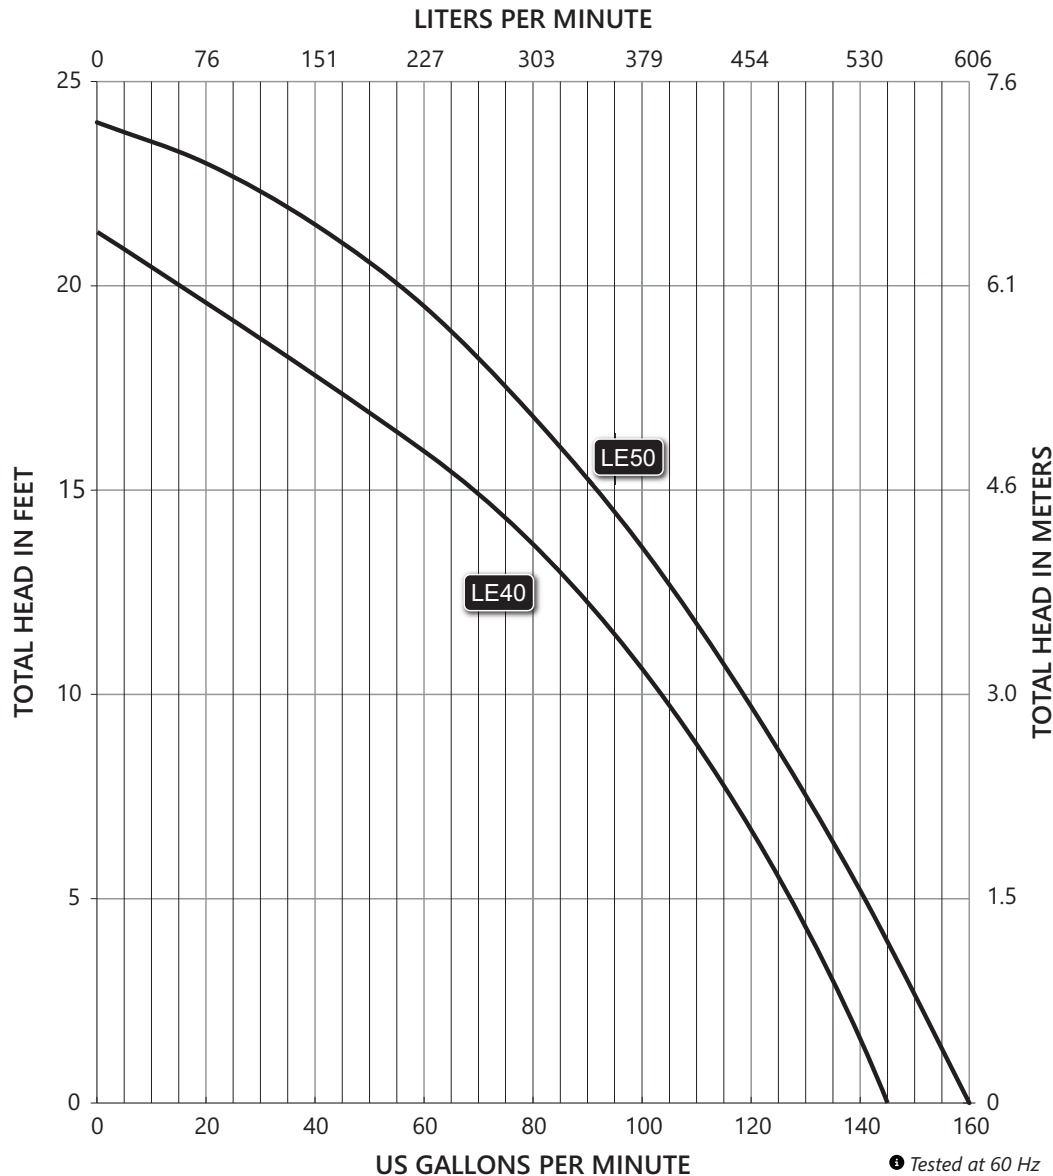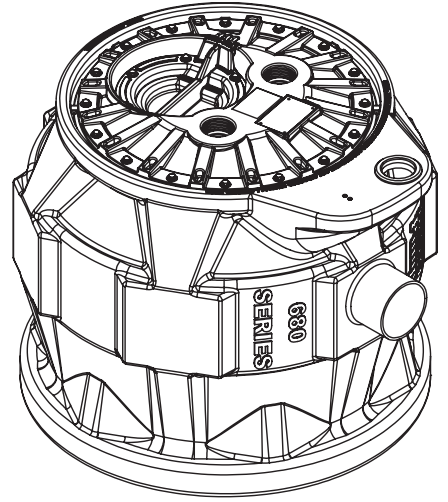


Pro680-Series Dimensional Data

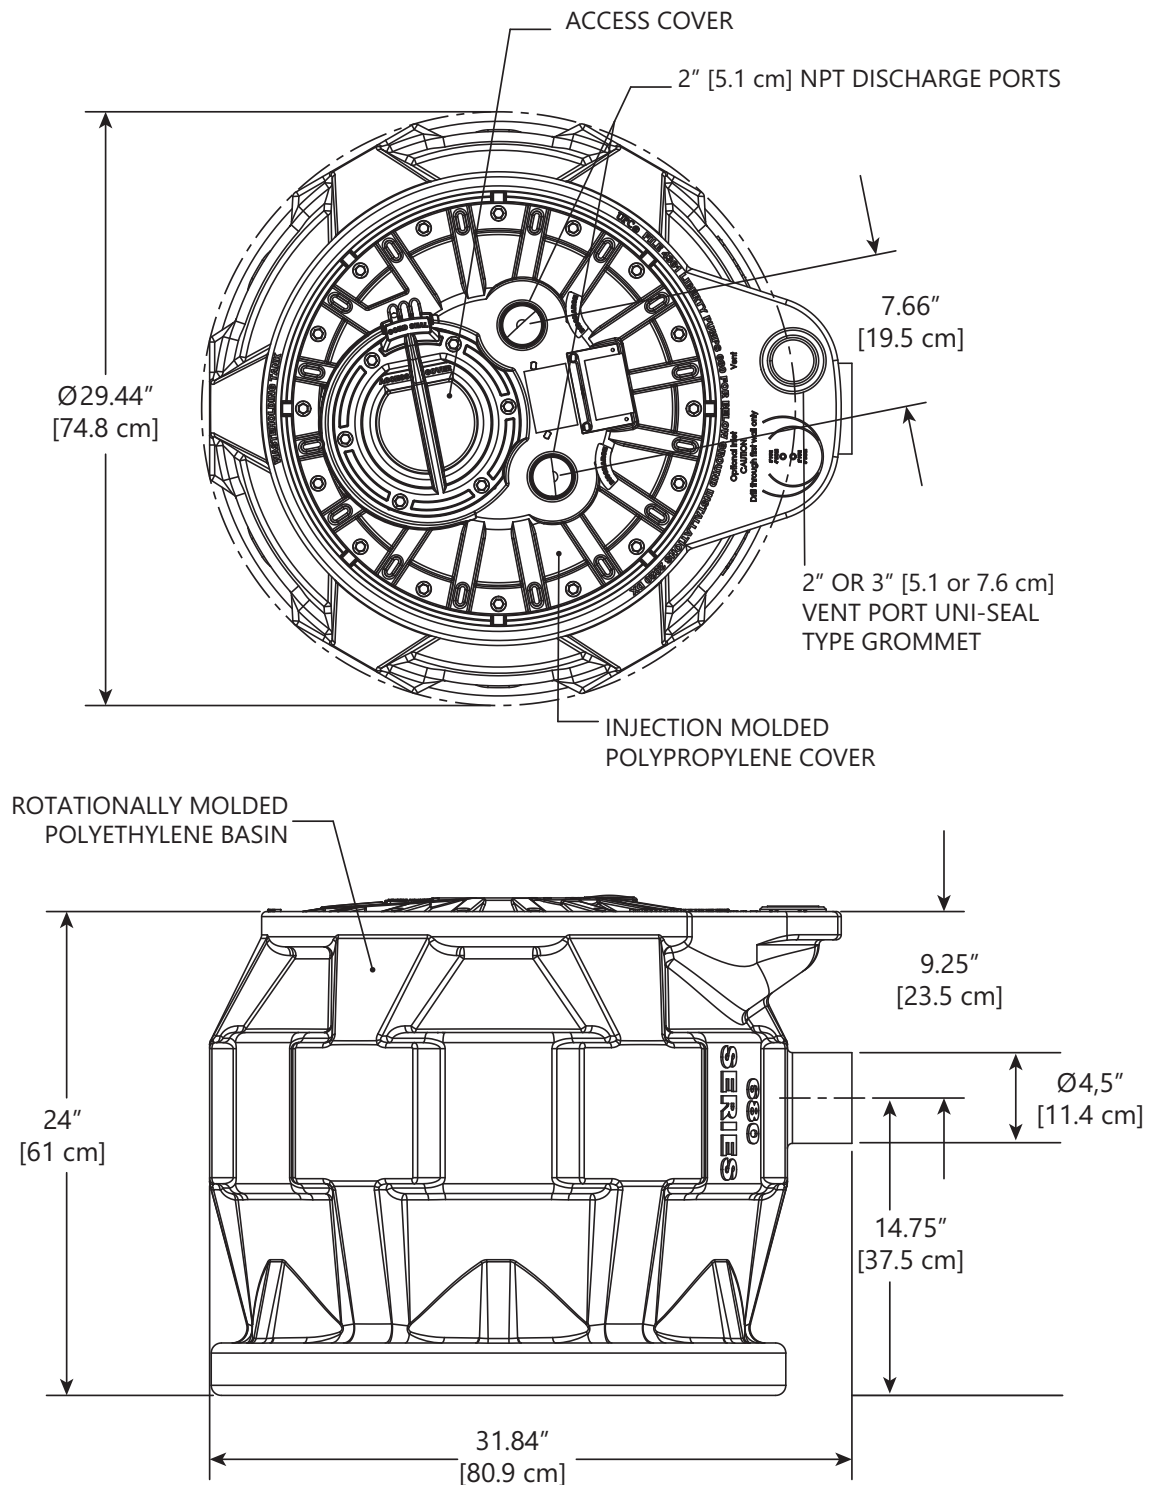



Pro680-Series Dimensional Data

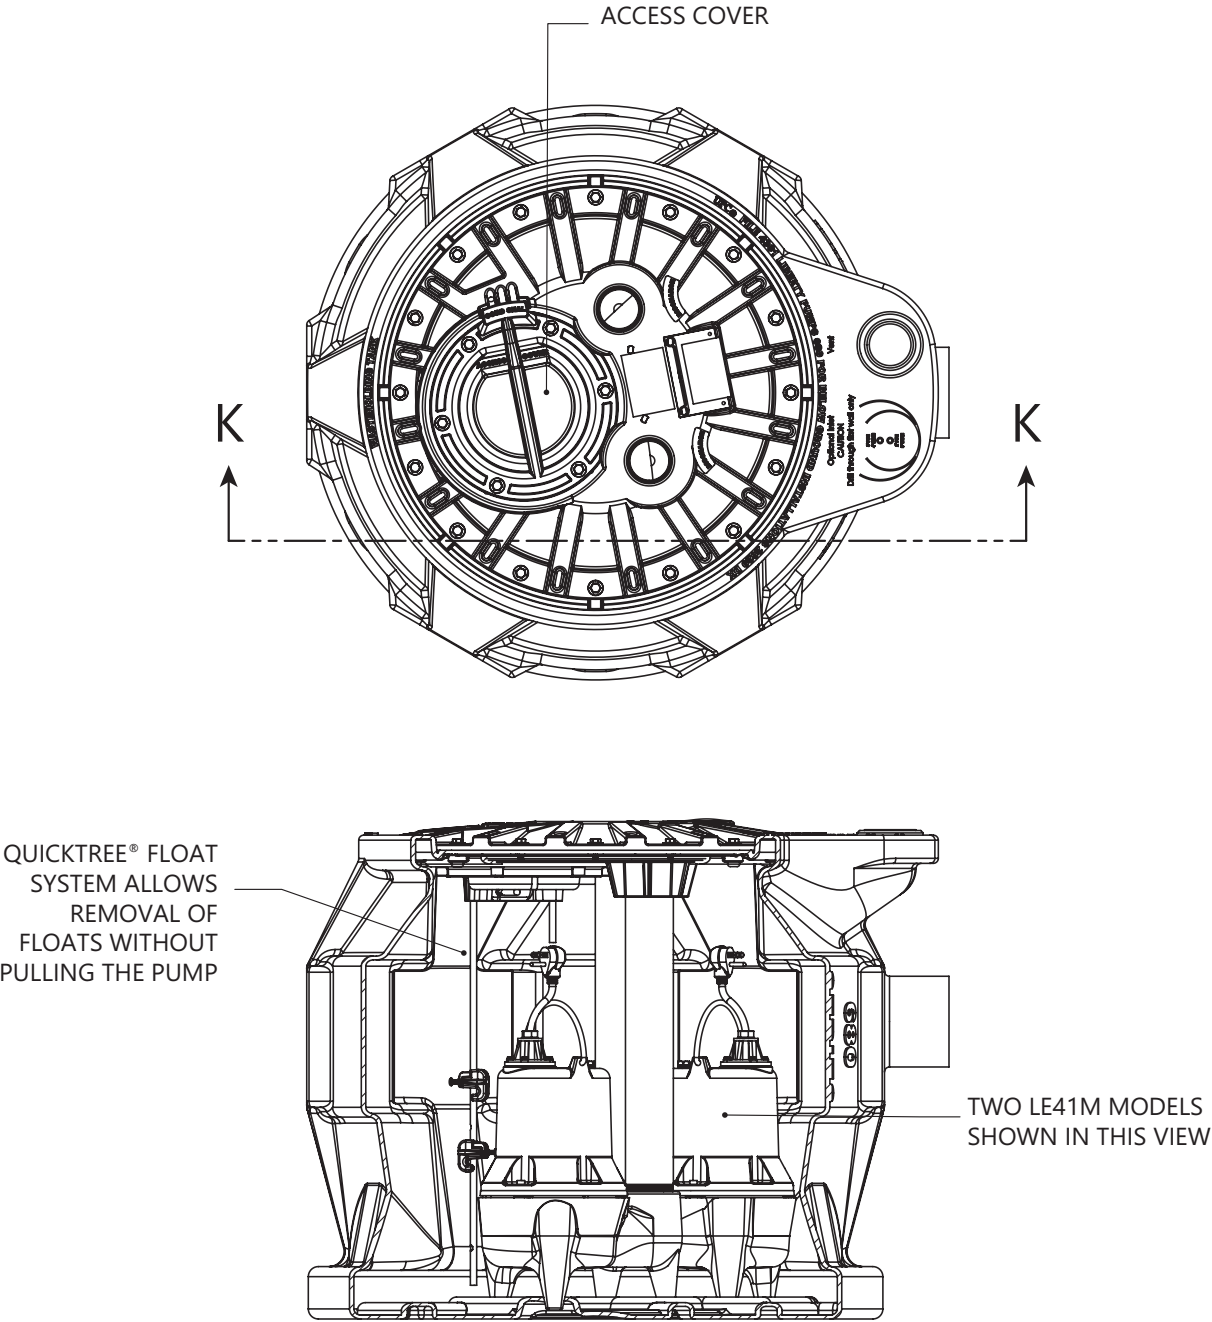

Pro680-Series Dimensional Data

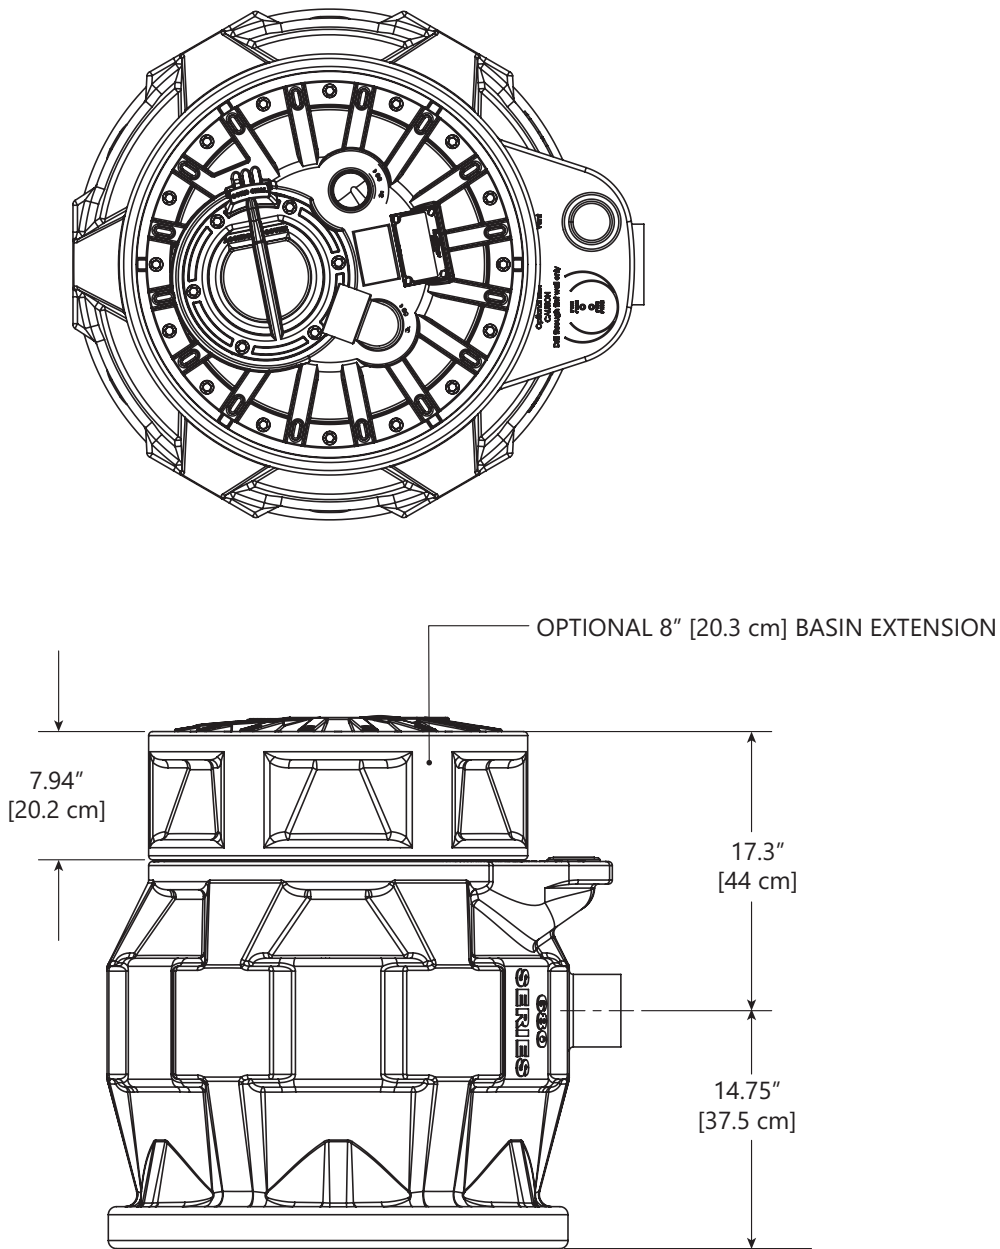

P680 OUTDOOR APPLICATION

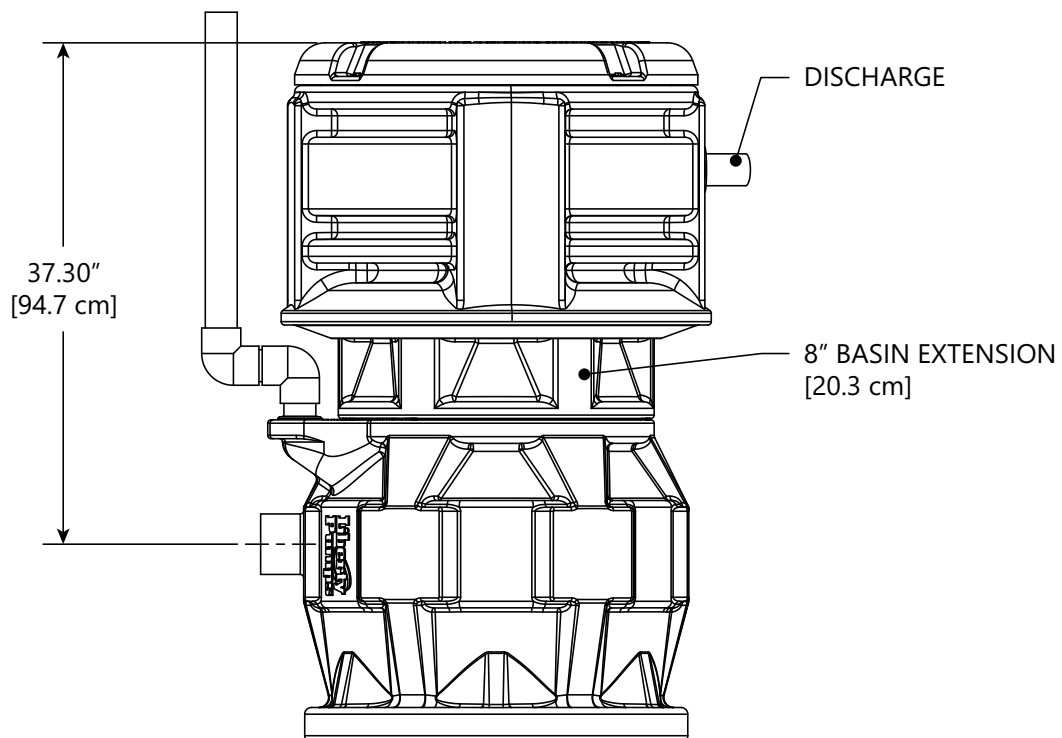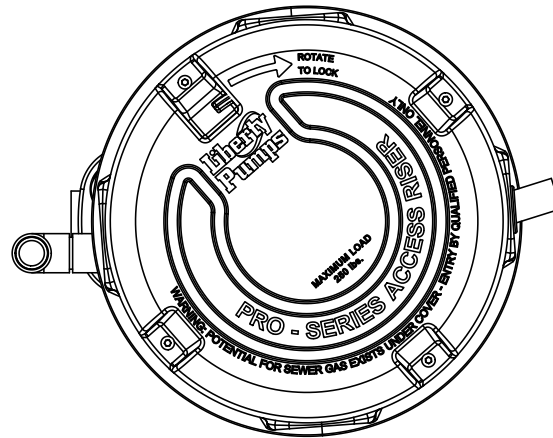

Pro680-Series Electrical Data

MODEL	HP	VOLTAGE	PHASE	SF	FULL LOAD AMPS	LOCKED ROTOR AMPS	THERMAL OVERLOAD TEMP	STATOR WINDING CLASS	DISCHARGE	CORD ASSEMBLY LENGTH [FT]	AUTOMATIC	CONTROL PANEL
P682XLE41	4/10	115	1	1.00	12	22.5	105°C 221°F	B	2"	10	YES	PDC-115
P682XLE41-2	4/10	115	1	1.00	12	22.5	105°C 221°F	B	2"	25	YES	PDC-115-2
P682XLE41W	4/10	115	1	1.00	12	22.5	105°C 221°F	B	2"	10	YES*	PDCW-115
P682XLE41W-2	4/10	115	1	1.00	12	22.5	105°C 221°F	B	2"	25	YES*	PDCW-115-2
P682XLE51	1/2	115	1	1.00	12	22.5	105°C 221°F	B	2"	10	YES	PDC-115
P682XLE51-2	1/2	115	1	1.00	12	22.5	105°C 221°F	B	2"	25	YES	PDC-115-2
P682XLE51W	1/2	115	1	1.00	12	22.5	105°C 221°F	B	2"	10	YES*	PDCW-115
P682XLE51W-2	1/2	115	1	1.00	12	22.5	105°C 221°F	B	2"	25	YES*	PDCW-115-2
P682XLE52	1/2	208–230	1	1.00	6.8	12	105°C 221°F	B	2"	10	YES	PDC-230
P682XLE52-2	1/2	208–230	1	1.00	6.8	12	105°C 221°F	B	2"	25	YES	PDC-230-2
P682XLE52W	1/2	208–230	1	1.00	6.8	12	105°C 221°F	B	2"	10	YES*	PDCW-230
P682XLE52W-2	1/2	208–230	1	1.00	6.8	12	105°C 221°F	B	2"	25	YES*	PDCW-230-2

Note: * = outdoor panel

Pro680-Series Technical Data

SYSTEM	TANK	UPC LISTED POLYETHYLENE BASIN MEETS IAPMO PS52 10' STACK TEST
	COVER	POLYPROPYLENE
	GUIDE RAIL	NONE – PUMPS PULL OUT WITH COVER
	INLET HUB	INCORPORATED INTO TANK
	DISCHARGE PIPE	SCHEDULE 80 PVC
	CONTROLS	PDC DUPLEX CONTROLLER
PUMP	IMPELLER	ENGINEERED THERMOPLASTIC
	SOLIDS HANDLING SIZE	2"
	PAINT	POWDER COAT
	MAX LIQUID TEMP	60°C [140°F] INTERMITTENT
	THERMAL OVERLOAD	105°C [221°F]
	POWER CORD TYPE	SJTW
	MOTOR HOUSING	CAST IRON
	VOLUTE	CAST IRON
	SHAFT	STAINLESS STEEL
	HARDWARE	STAINLESS STEEL
	O-RINGS	BUNA-N
	MECHANICAL SEAL	CARBON CERAMIC

Pro680-Series Specifications

See individual pump specifications for more details on the pumps.

1.01 WARRANTY

Standard limited warranty shall be 3 years.